


B-Side

Side Table & Stool

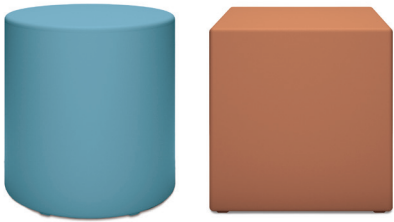

Finishes

See Design Guide for finish options.

Options

- Factory Ballasting (50 lbs / 22.7 kg)
*Ballastable up to 100 lbs (45.4 kg) of dry sand.
On site ballast materials not supplied by Norix.

Assembly

None required.

*Intended for indoor use only

Model	Weight		Top Size		Height	
	lbs	kg	in	cm	in	cm
BE970 (round)	9	4.1	18" Diameter	45.7 Diameter	18"	45.7
BE985 (square)	12	5.5	18"x18"	45.7x45.7		

Fabrication & Material

One-piece, rotationally-molded, specially formulated, high-impact polyethylene with ultraviolet light stabilizers (to reduce fading). Premium TruColor™ polymer is fully compounded for superior color consistency and durability. Made in USA.

Warranty

Lifetime warranty.

Maintenance

For routine and regular cleaning maintenance, Norix recommends the use of Simple Green® or an equivalent cleaning product. This product is bleach/water solution cleanable and suitable for use with hospital-grade disinfectants (such as Virex®, Wexcide® or Oxivir Five 16®) per manufacturers' instructions.

Performance Test Standards

- Product tested to 500 lbs (226.8 kg) static load.

Environmental Test Standards

- GREENGUARD and GREENGUARD Gold Certified by UL Environment. Product certified for low chemical emissions to UL 2818. UL.COM/GG.

Flammability Test Standards

- State of California, Technical Bulletin No. 133, Flammability Test Procedure for Seating Furniture for Use in Public Occupancies
- UL1056 Fire Test of Upholstered Furniture
- ASTM E1537 Test Method for Fire Testing of Real Scale Upholstered Furniture Items

