

Assembly Notes: Norix is not responsible for any damage due to improper installation. If your shipment does not match the parts list, please contact Norix Customer Service at 800-234-4900. Norix reserves the right to modify design specifications at any time without an obligation to owners of previously sold products.

ITEM NO.	PART NUMBER	QTY	DESCRIPTION
1	029-022	6	Glide 5/16"-18 X 1.5" Hex Collar Stem
2	029-023	8	Glide Assembly, 1" Stem
3	029-132	6	Ring, Restraint, Solid Bolt Down, (Optional)
4	029-021	14	Nut, Barrel 5/16"-18 X 0.75"L, BH, Pin in Torx® T45, SST
5	025-009	8	Washer, Flat, 3/8"
6	026-002	14	Washer, Fender, 11/32" ID x 1-1/4" OD x .050 Zinc
7	025-006	14	Washer, Lock, Split, 3/8, Zinc
8	025-010	14	Nut, Hex, 5/16-18 Steel, Zinc

1. Glide assemblies **without** Restraint Rings are to be located at positions indicated by "A" (**Fig. 1**). Restraint Ring/Glide assemblies should be located at "B" positions.
2. Assemble the components in the sequence shown in (**Fig. 2**).
3. Maximum of 1/4" space between hex nut and Glide nut (**Fig. 3**).

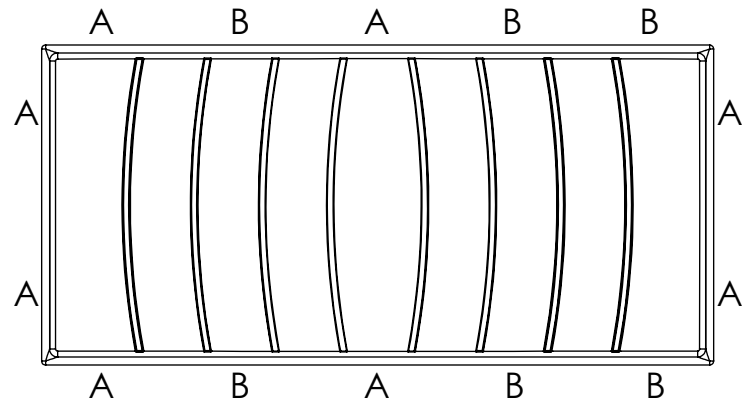


Fig. 1




Fig. 3

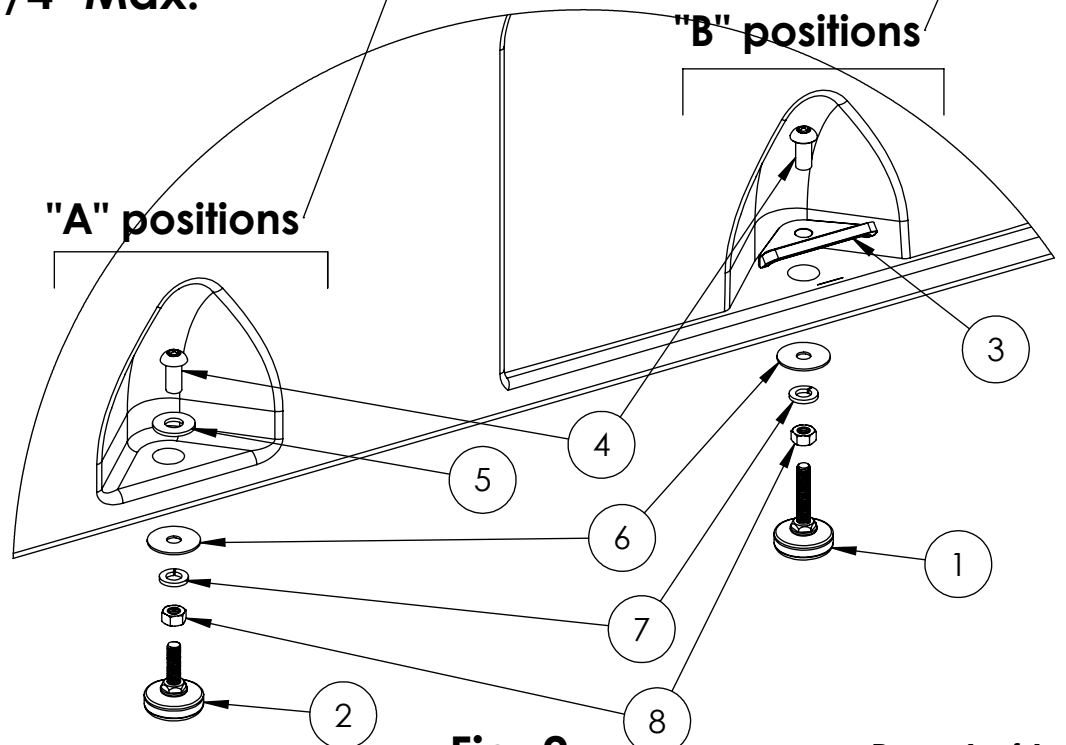


Fig. 2