


Assembly Notes: Norix is not responsible for any damage due to improper installation. If your shipment does not match the parts list, please contact Norix Customer Service at 800-234-4900. Norix reserves the right to modify design specifications at any time without an obligation to owners of previously sold products.

Parts List			
ITEM	QTY.	PART NUMBER	DESCRIPTION
A	16	021-002	Machine Screw 5/16"-18 x 1-1/4", Back
B	4	033-XXX	Table Leg (Glided / Bolt-down)
C	1	055-XXXX	Table Top

Tools Needed
Low RPM Variable Speed Drill
3/8" Concrete Drill Bit
Rubber Mallet
Shop Vacuum

**Step 1:** Place table top upside down on a soft, flat protective surface. Secure each leg to the table top using 4 Torx tamper resistant screws. Do not over tighten, as damage may occur to the table. Turn the table right side up to support on legs. Position the table for bolt down application in the exact location desired.

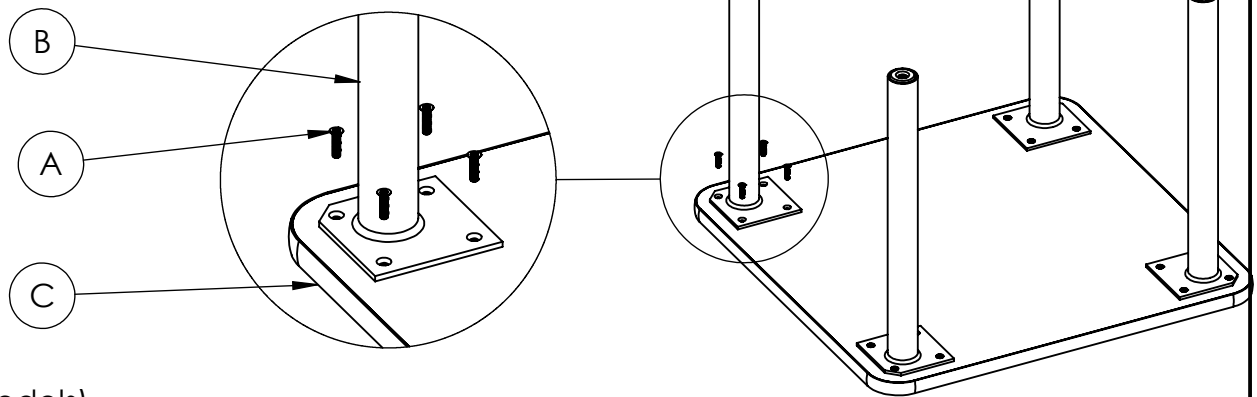

(Bolt Down Models)

**Step 2:** Using the table legs as a template, mark each hole location on the floor. Using a 3/8" concrete drill bit, anchor each leg by drilling a 2.5" deep hole into the concrete floor. Completely remove all the concrete dust from in and around the hole.

**Step 3:** Position table and Place the anchor through the bolt down tab on the leg, into the drilled hole in the concrete. Using a rubber mallet, hammer the anchor until it is secure in the hole. Expand the anchor by tightening the head.

