



Height	in	cm
Slammer Stone Seat	18.9"	48
Stainless Steel Seat	18.3"	46.5
Table Top	31.8"	80.8

Finishes

See Design Guide for finish options.

Options

- Glide Kit
- Bolt-Down Kit
- Stainless Steel Seats

*12" (30.5 cm) diameter stainless steel #4 finish. Decreases seat height to 18.25" (46.4 cm), additionally charge for upgrade.

- Stainless Steel Quietcore Top

*Durable 18 gauge stainless steel top surface wrapped around sound deadening particle board core with embedded T-nuts. 1¼" (3.2 cm) edge profile. (Available in the following sizes only - 42" (106.7 cm) round and 54" (137.2 cm) round).

- Rectangle Stainless Steel Top

*Stainless steel, 10 gauge, 304 stainless steel with a 1½" (3.8 cm) drop edge. Four stainless steel studs welded to the underside for attaching each leg. Changes height to 30.5" (77.5 cm) (Available in the following sizes only - 30"x72" (76.2x182.9 cm) and 30"x96" (76.2x243.8 cm)).

- ADA

*ADA-compliant version with 30"x72" (76.2x182.9 cm), 30"x96" (76.2x243.8 cm), 42" (106.7 cm) round, 54" (137.2 cm) round and 60" (152.4 cm) round versions.

Assembly

Secure base to top. Attach seats. Refer to manufacturer's instructions for assembly.

*Intended for indoor use only

Models	Weight		Top Size		Overall Footprint	
	lbs	kg	in	cm	in	cm
M44200	183	83	42" Diameter	106.7 Diameter	76"x76"	193x193
M65400	270	122.5	54" Diameter	137.2 Diameter	88"x88"	223.5x223.5
M86000	372	168.7	60" Diameter	152.4 Diameter	94"x94"	238.8x238.8
M63072	280	127	30"x72"	76.2x182.9	63"x72"	160x182.9
M83096	375	170.1	30"x96"	76.2x243.8	63"x96"	160x243.8

Fabrication & Material

Legs: The curved, tubular steel that supports the top has a 10" (25.4 cm) radius bend to facilitate easy cleaning beneath the table. This curved piece is fully welded to a vertical steel tube that supports the seat. The top of the curved tubes and top of the seat tubes have fully welded 6" x 6" x ¼" (15.2 x 15.2 x 0.6 cm) thick steel mounting plates for installing top and seats. Bottom of seat tube has a fully welded mounting plate inset. For free standing applications, the inset is threaded to accommodate a tamper and skid-resistant, adjustable glide with a ½" (1.3 cm) diameter stem. For bolt-down application, the inset has a hole for the fully enclosed, tamper-resistant, bolt-down system. 3" (7.6 cm) diameter, 14 gauge steel tubing.

Standard Laminate Top: Premium M3 Grade, 45 lb. (20.4 kg) density particle board table top core is sandwiched between ⅛" (0.3 cm) thick hardboard and faced with special 0.05" (0.1 cm) thick high pressure laminate for superior quality and long term durability. Molded edge is radiused for safety and comfort, pressure fused to the top, rendering it firmly attached and highly sanitary. Embedded T-nuts secure top to base with tight steel to steel connection for maximum long term reliability. Robust 1.5" (3.8 cm) thick edge profile.

Super Slammer Stone Seats: 13" (33 cm) diameter high-density, color-impregnated, compression-molded composite that is highly scratch and stain resistant. Four molded-in threaded inserts for superior metal-to-metal connection. Made in the U.S.A.

Warranty

10 year limited replacement warranty.

Installation

Fasten to the floor. No installation required on free standing models. Concealed concrete expansion anchors included with bolt-to-the-floor option.

Performance Test Standards

- Product tested to 1,000 lbs (453.6 kg) static load.

Environmental Test Standards

- GREENGUARD and GREENGUARD Gold Certified by UL Environment. Product certified for low chemical emissions to UL 2818. UL.COM/GG.

*See page 2 for Maintenance and ADA configurations.




Maintenance

Laminate Tops: For routine and regular cleaning maintenance, Norix recommends the use of Simple Green® or an equivalent cleaning product.

Legs and Stainless Steel Tops: When cleaning stainless steel, Norix recommends the use of a cleaner made especially for stainless steel products.

Legs: Norix recommends the use of soap and water for both the regular cleaning maintenance and deep-scrub cleaning of steel.


ADA Gametop Laminate Configuration

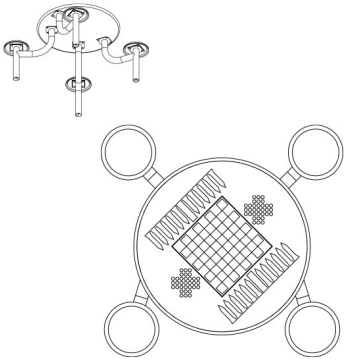

Max-Master 4 Seat Round ADA

To accommodate those in wheelchairs, you will notice that two seats have been installed with modified angles. This allows for a 30" (76.2 cm) opening to allow a wheelchair access under the table.


* These seat angles will affect the position of the seat to gametop.

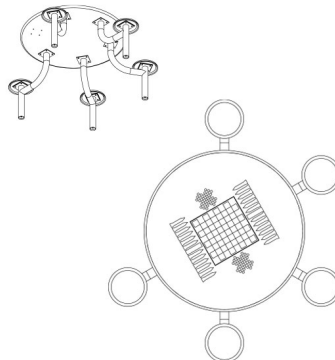

Max-Master 6 & 8 Seat Round ADA

To accommodate those in wheelchairs, you will notice that one of the seating positions have been removed.

* These seat angles will affect the position of the seat to gametop.

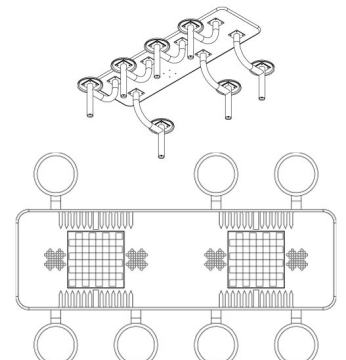

Max-Master 8 Seat Rectangle ADA

To accommodate those in wheelchairs, you will notice that one of the seating positions have been removed.

* These seat angles will affect the position of the seat to gametop.