


B-Side

Side Table & Stool

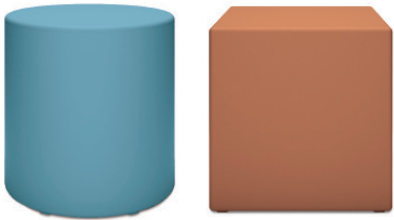

Finishes

See Design Guide for finish options.

Options

- Factory Ballasting (50 lbs / 22.7 kg)

**Ballastable up to 100 lbs (45.4 kg) of dry sand or gravel. On site ballast materials not supplied by Norix.*

Assembly

None required.

**Intended for indoor use only*

Model	Weight		Top Size		Height	
	lbs	kg	in	cm	in	cm
BE970 (round)	9	4.1	18" Diameter	45.7 Diameter	18"	45.7
BE985 (square)	12	5.5	18"x18"	45.7x45.7		

Fabrication & Material

One-piece, rotationally-molded, specially formulated, high-impact polyethylene with ultraviolet light stabilizers (to reduce fading). Premium TruColor™ polymer is fully compounded for superior color consistency and durability. Made in USA.

Warranty

10 year limited replacement warranty.

Maintenance

For routine and regular cleaning maintenance, Norix recommends the use of Simple Green® or an equivalent cleaning product. This product is bleach/water solution cleanable and suitable for use with hospital-grade disinfectants (such as Virex®, Wexicide® or Oxivir Five 16®) per manufacturers' instructions.

Performance Test Standards

- Product tested to 500 lbs (226.8 kg) static load.

Environmental Test Standards

- GREENGUARD and GREENGUARD Gold Certified by UL Environment. Product certified for low chemical emissions to UL 2818. UL.COM/GG.

Flammability Test Standards

- State of California, Technical Bulletin No. 133, Flammability Test Procedure for Seating Furniture for Use in Public Occupancies
- UL1056 Fire Test of Upholstered Furniture
- ASTM E1537 Test Method for Fire Testing of Real Scale Upholstered Furniture Items

