


Affinity Chair Ganging Instructions

Model Number
C011-052





www.norix.com • TEL 800 234-4900

Assembly Notes: Norix is not responsible for any damage due to improper installation. If your shipment does not match the parts list, please contact Norix Customer Service at 800-234-4900. Norix reserves the right to modify design specifications at any time without an obligation to owners of previously sold products.

PARTS LIST				Tools Needed
ITEM NO.	QTY	PART NUMBER	DESCRIPTION	Low RPM Variable Speed Drill or Hex Bit Screwdriver
A	n/a	varies	Affinity Chair	
B	n/a	021-197	Screw, Machine 1/4"-20 X 1-1/2", FH, Pin in Torx® T-30, Zinc	T-27 Pin-in-Torx® Bit
C	4	021-201	Screw, Machine 1/4-20 X 1-3/4"L, BH, Pin in Torx® T27, Zinc	T-30 Pin-in-Torx® Bit
D	1	011-056	Affinity Ganging Bracket	

1) Remove (4) screws **B** from the location where the bracket will be placed. If more than two chairs will be ganged, DO NOT remove all of the screws **B** at once. Alignment will be more difficult if all four seat screws are removed at once. Screws **B** will not be re-used.

2) Install Bracket **D**, using (4) screws **C**. Start screws by hand to avoid cross-threading. Do not overtighten screws.

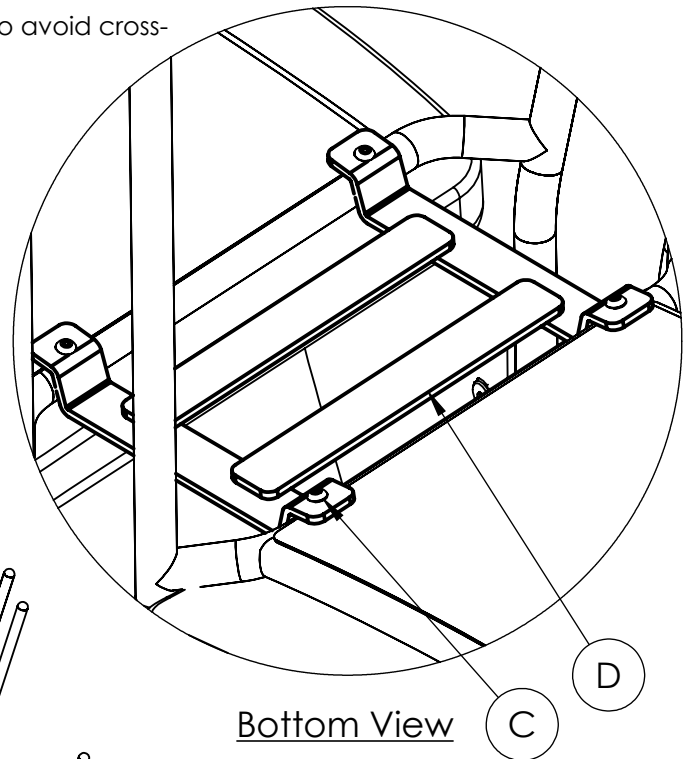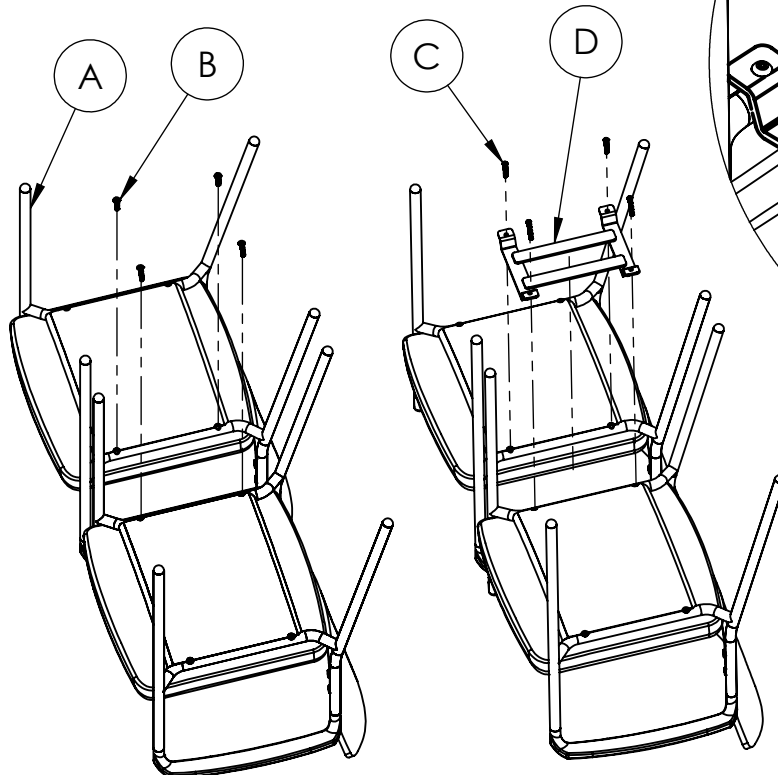

Bottom View