




## Arm Upholstery Replacement Assembly Instruction

Model Number  
LA-XXXX-XXXX; LC-XXXX-XXXX;  
LE-XXXX-XXXX



www.norix.com • TEL 800 234-4900

Assembly Notes: Norix is not responsible for any damage due to improper installation. If your shipment does not match the parts list, please contact Norix Customer Service at 800-234-4900.  
Norix reserves the right to modify design specifications at any time without an obligation to owners of previously sold products.

| Parts List |      |                                |
|------------|------|--------------------------------|
| ITEM       | QTY. | DESCRIPTION                    |
| A          | 1    | OUTER ARM UPHOLSTERUY ASSEMBLY |
| B          | 1    | INNER ARM UPHOLSTERUY ASSEMBLY |



| Tools Needed                 |
|------------------------------|
| Low RPM Variable Speed Drill |
| Pin in Torx® Bit, T-40       |

### **STEP 1:**

Following instruction 091-880 remove Seat and Back Cushions


### **STEP 2:**

Remove two screws and carefully knock out the Arm Assembly from the Frame, using a Rubber Mallet.

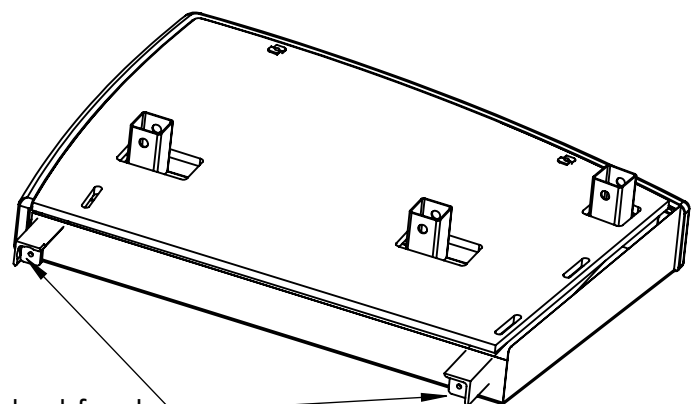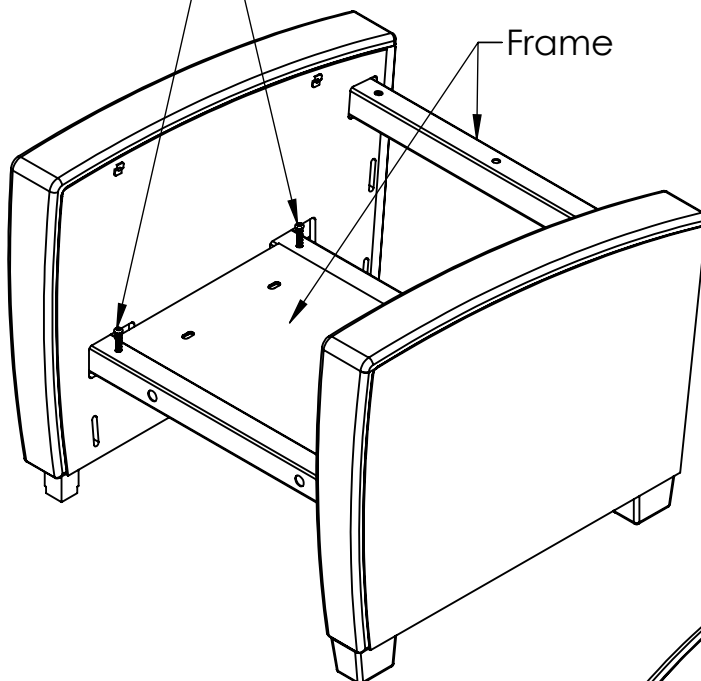


### **STEP 3:**

Remove two screws and molded feet

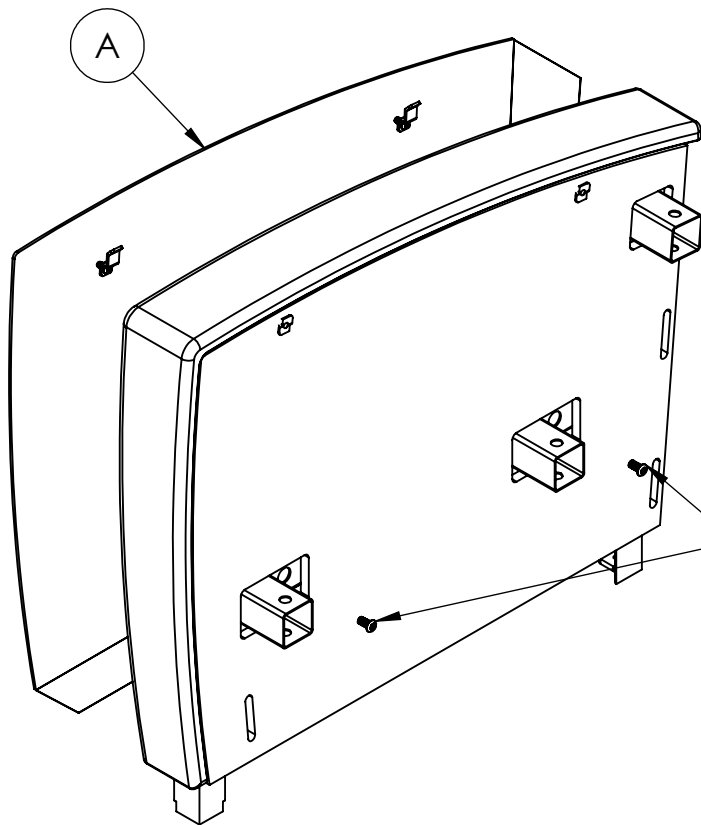

**STEP 4:**

Remove Two Screws and disengage the Outer Arm upholstered assembly Item A.

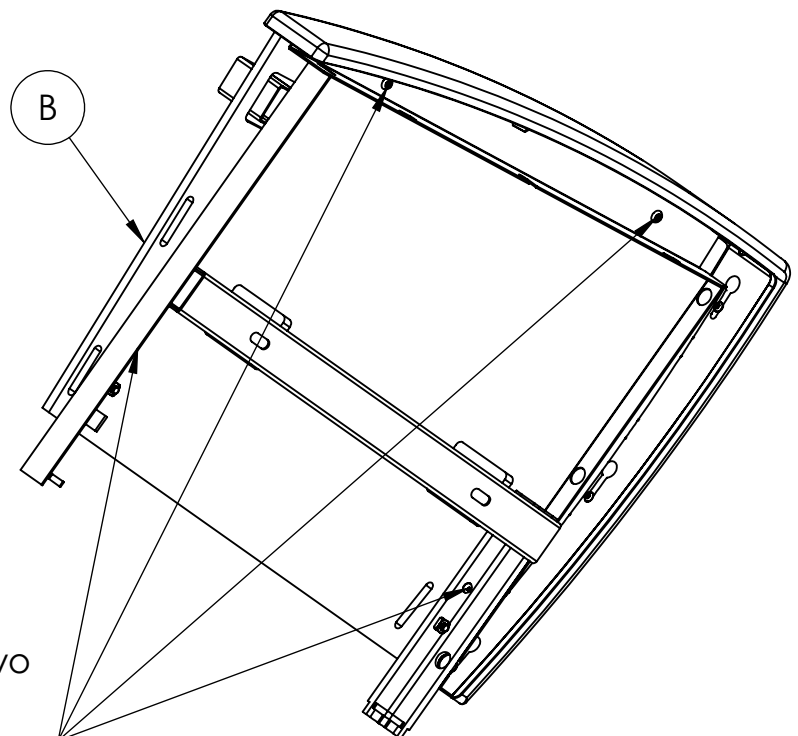

**STEP 5:**

Remove Two Wood Screws and Two Machine screws. Disassemble the Inner Arm Upholstery Item B.

## Assemble the chair in opposite order

Install the Inner Upholstery first using clamps as shown.



Be sure there is no gap in between the plastic cap and upholstery.



Install the Outer Upholstery first using clamps as shown.

