


## Harmony Seating Bolt Down Assembly Instructions


**Kit Number**  
**C011-L1-001**



www.norix.com • TEL 800 234-4900

Assembly Notes: Norix is not responsible for any damage due to improper installation. If your shipment does not match the parts list, please contact Norix Customer Service at 800-234-4900. Norix reserves the right to modify design specifications at any time without an obligation to owners of previously sold products.

Parts List				Tools Needed
ITEM	QTY.	PART NUMBER	DESCRIPTION	Low RPM Variable Speed Drill
A	1		Harmony Seating	Pin in Torx® T-40 Driver Bit
B	4	011-036	Bracket, Bolt Down	
C	4	021-002	Screw 5/16"-18 X 1-1/4"L, FH, Pin in Torx T-40, Black Oxide	

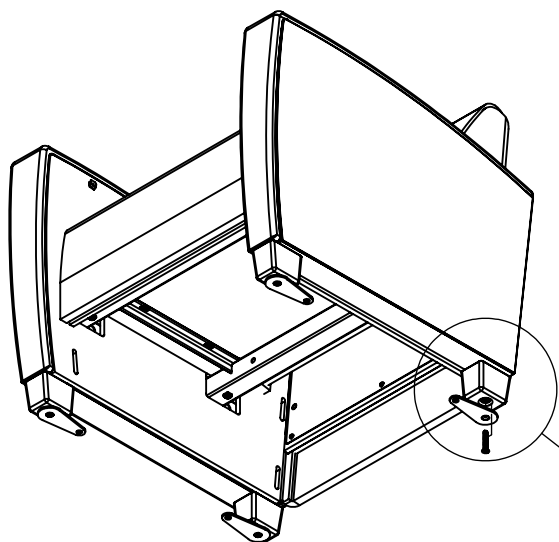

1. Remove and discard screws from each molded foot (do not remove the foot).

2. Install Bolt-Down Tabs(B) with Screws(C) as shown. Refer to illustrations.

3. Rotate brackets to desired angle underneath the product where possible and tighten screws. **DO NOT OVERTIGHTEN SCREWS.**

4. Turn product upright and mark anchor locations on floor.

5. Install mounting hardware (not included).

