




1



Flip Wink on back


2

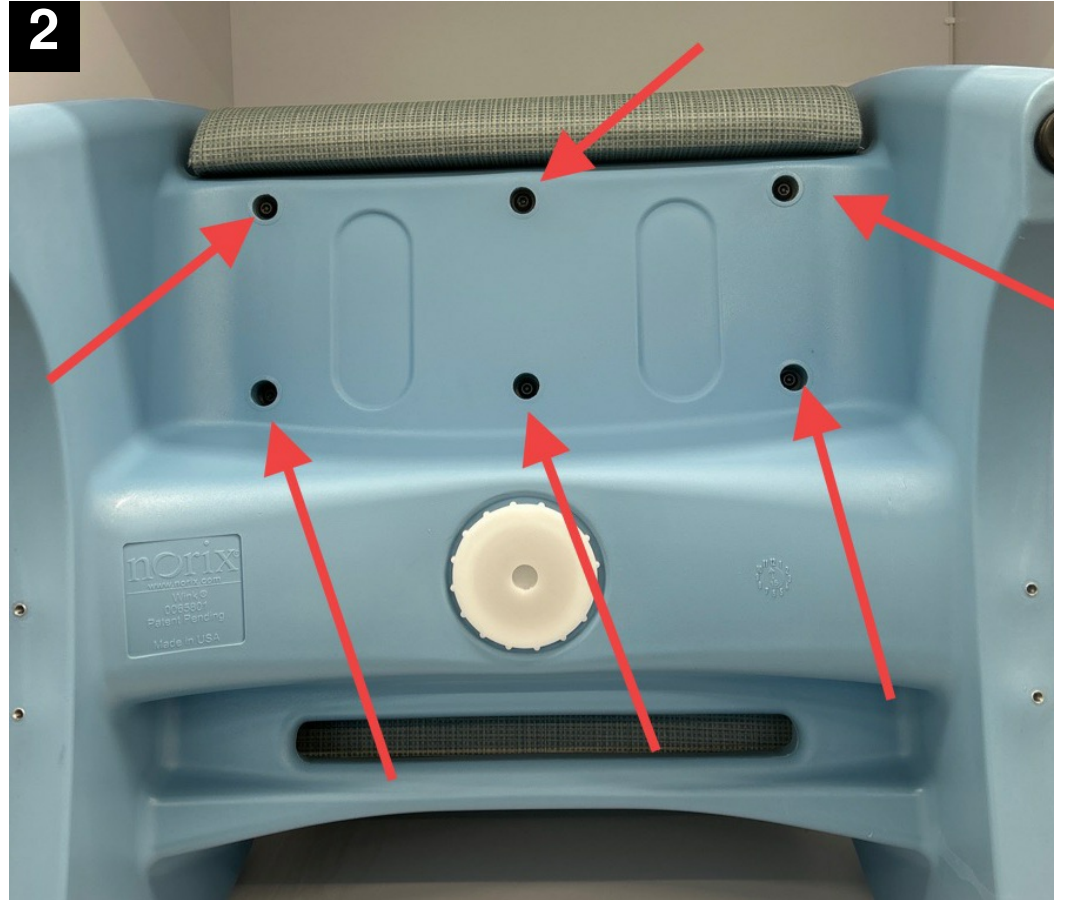

Remove 6 screws and washers using T-40 bit in a screwdriver or screw gun. Lift seat cushion off. Put new seat cushion in place, line up screw holes.



3

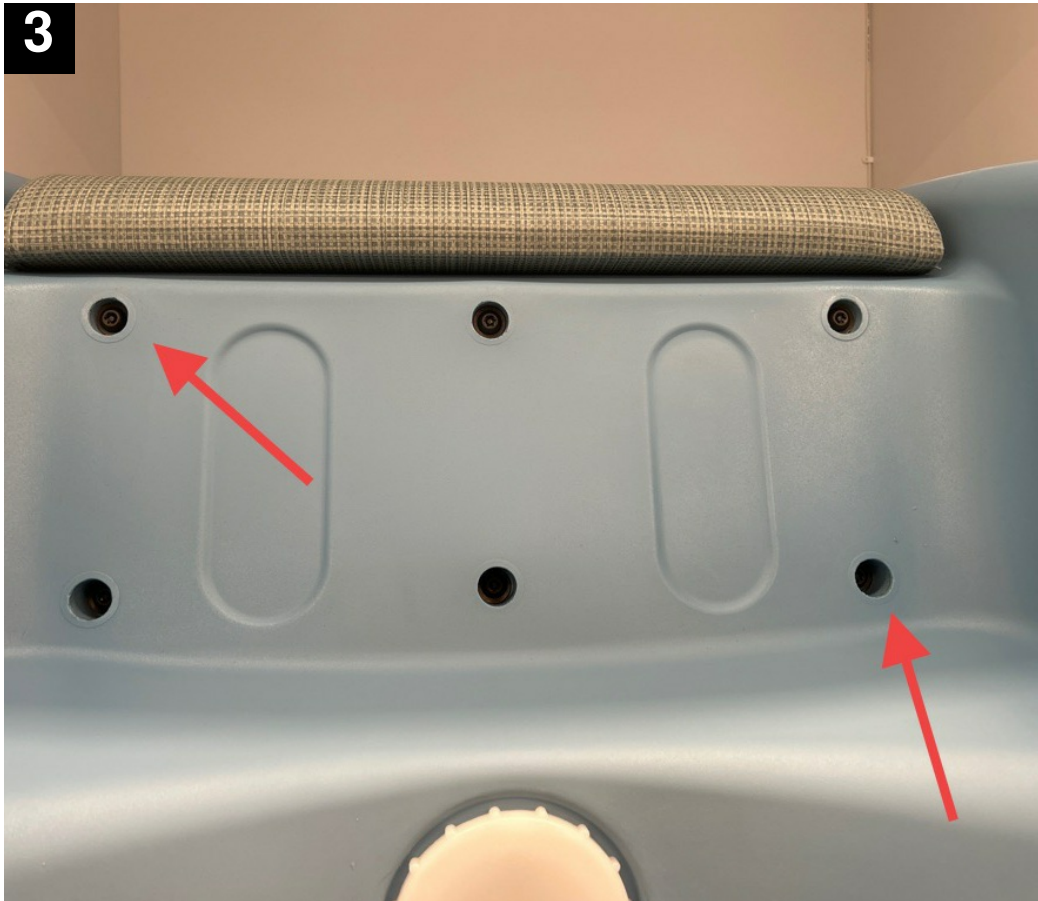

Attach with first screw at a corner position. Do not tighten all the way. Attach second screw at the opposite corner. Now you can put the remaining of screws with washers in the rest of them. Go back and tighten all of them.